


技术性能参数 SPECIFICATION

接触电阻（初始值）Contact Resistance	≤50mΩ
绝缘电阻（常态）Insulation Resistance	≥1,000MΩ
耐压（常态）Dielectric Strength	1,500V AC , 1min
工作环境温度 Operating temperature	T55 , T85 , T125
电气寿命（次）Electronic Life(cycles)	10,000


电气额定值Max. Rating Current & Voltage

CQC CE	16(4)A 250V AC T85
UL	16R(4)A 125V AC 16R(4)A 250V AC 1HP 125V AC
CB 17	16(4)A 250V AC T125, 10(4)A 250V AC T125 16(4)A 250V AC T85, 16A 250V AC

外形尺寸

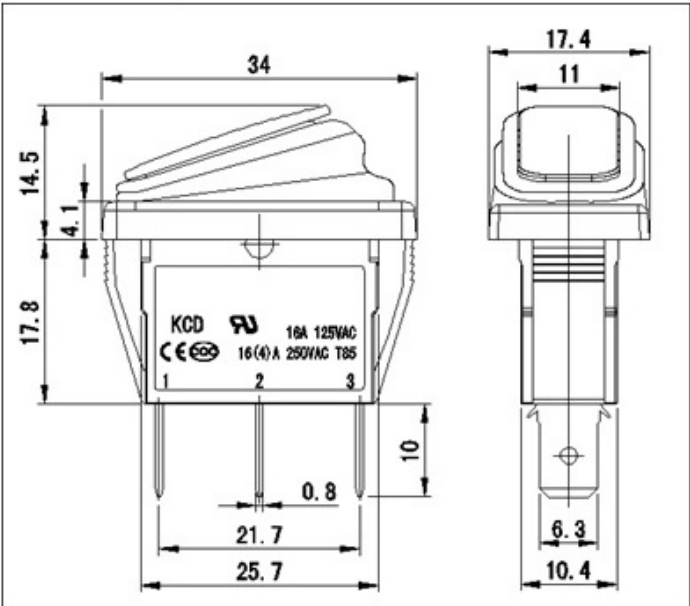

安装开孔尺寸

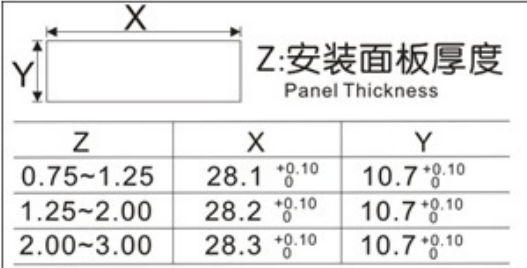

Material	PA66/PC
Main Function	Waterproof DPST ON-OFF
Rating	20A 125VAC 15A 250VAC 35A 12VDC
Color	B&&R
Contact Resitance	<35MΩ
Insulation Resistance	500VDC 100 MΩ min
Dielectric Strength	1500VAC,1 minute
Operating Temperature	-25℃~+85℃
Ambient Temperature	-10℃~+85℃
Contacts & Terminals & Mid pins	Copper with compound silver and Copper with silver plated