

 Industrial & Electrical Components	General-purpose Power Relay	Part No. HHC70A (JQX-10F)
---	--	--



- High Switching capacity
- 8 or 11 pin plug-in terminal

CONTACT

Arrangement	2C/3C
Contact Material	Silver alloy
Contact Resistance	
(By voltage drop 6V 1A)	Max.50mΩ(1A 24VDC)
Contact Capacity	10A, 250VAC/30VDC
Nominal coil power	2W /3.5VA

CHARACTERISTICS

Operate Time	Max.20ms
Release Time	Max.20ms
Dielectric Strength	
Between contacts	1200VAC/1m
Between contacts and coil	1500vAVC/1m
Insulation Resistance	500MΩ 500 VDC
Terminal type	Plug-in

ORDERING INFORMATION

e.g

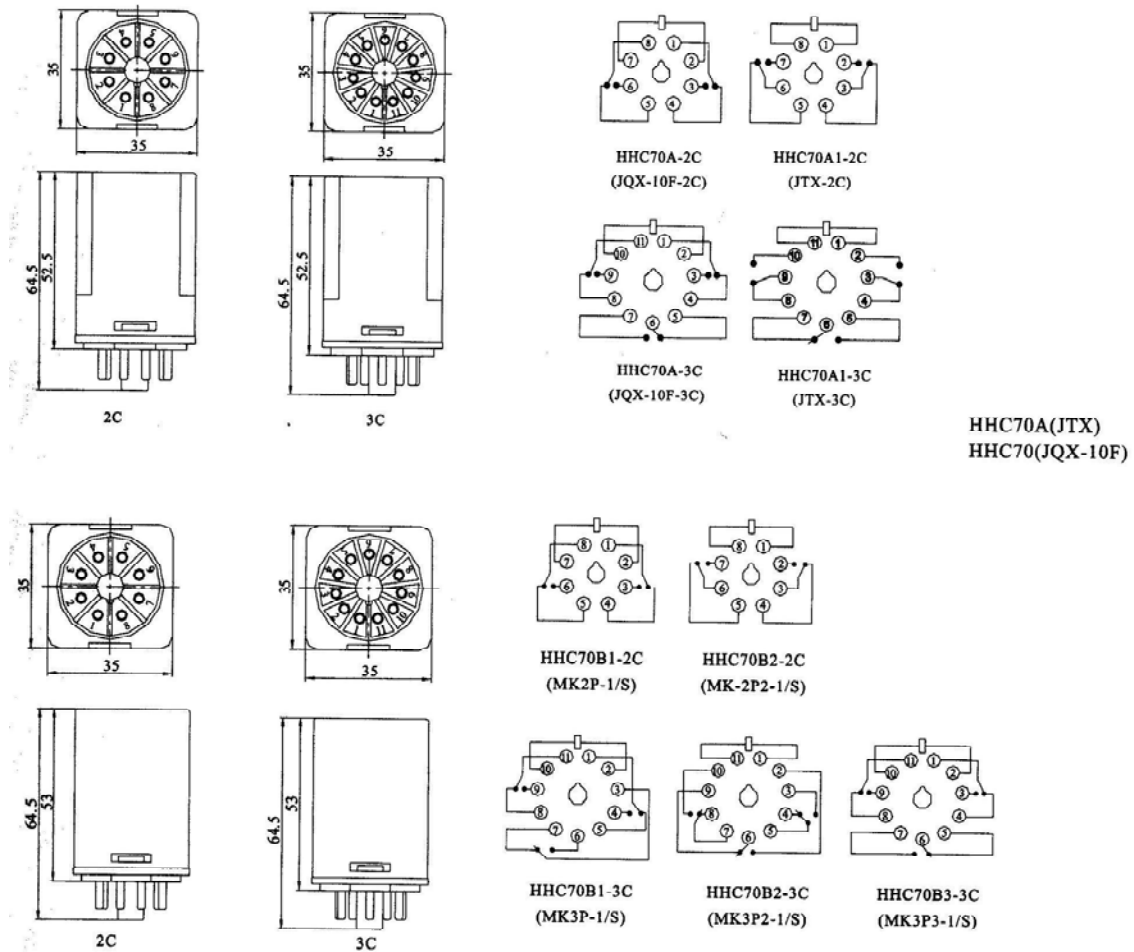
HHC70A - 1- 2C - 220VAC

① ② ③ ④

- ① Series: NCR General-purpose power relay series
- ② Wiring Means
- ③ Contact Form: 2C,3C
- ④ Coil voltage: 6 ~ 220 DC
6 ~ 380 AC

COIL DATA

Nomina lVoltage (VDC)	Pick-up Voltage VDC(Max)	Drop-out Voltage VDC(Min)	Coil Resistance (Ω) $\pm 10\%$
6	4.5	0.6	18
12	9.0	1.2	72
24	18	2.4	288
48	36	4.8	1152
100	75	10	5000
110	82.5	11	6050

DIMENSIONS (Unit: mm)

Industrial & Electrical Components