


Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1225

■ Dimensions(mm)




Weight: 0.8g


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

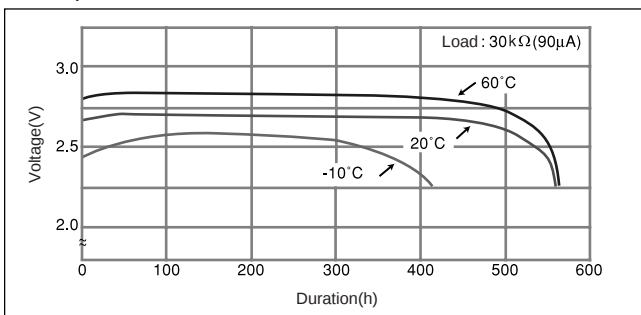

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

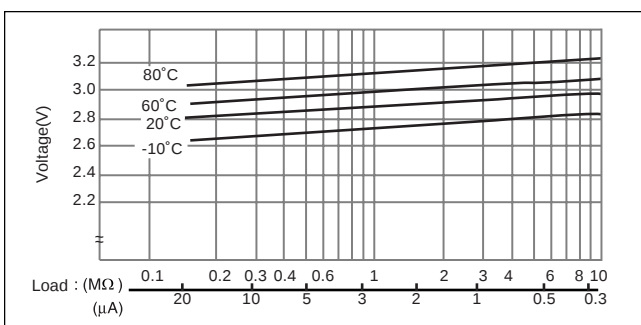


■ Capacity vs. load resistance

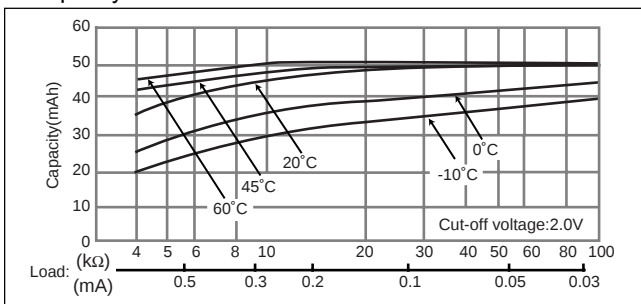

BR1616

■ Dimensions(mm)




Weight: 1.0g


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80

■ Temperature Characteristics

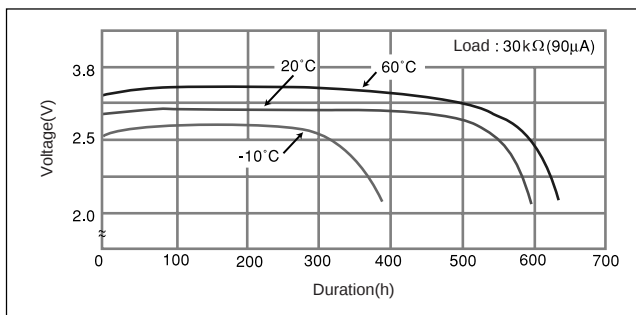

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

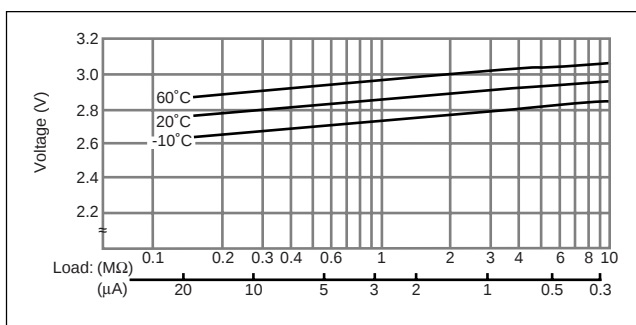

■ Capacity vs. load resistance

