

1

2

3

4


5

6

7

Signature	Revision History	Date	Rev.
Sean	For Bulk Production	May.20,2013	01

RoHS Compliant

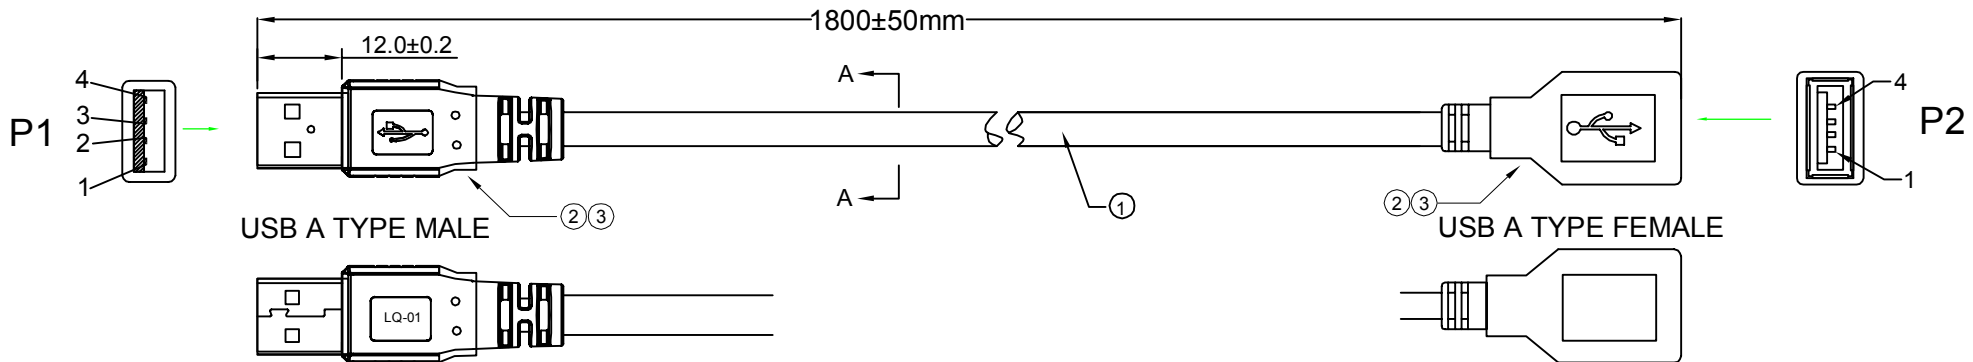

USB A TYPE MALE

USB A TYPE FEMALE

NOTES:

1.CABLE: NO-UL 30AWG(7/0.09BC)*4C+PVC JACKET OD=3.5±015mm JACKET COLOR: BLACK

2.CONNECTOR:

P1 : USB A/M, SOLDER, WHITE INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL
P2 : USB A/F, SOLDER, WHITE INSULATION, GOLD FLASH PLATED CONTACTS, NICKEL PLATED SHELL

3.HOOD: MOLDED TYPE,PVC 45P,COLOR:BLACK


4.ELECTRICLE TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE 5M ohm Min .
- (4)HI-POT TEST:DC 300V/10ms

PIN ASSIGNMENT

P1		P2	
1	RED	1	VCC
2	GREEN	2	-DATA
3	WHITE	3	+DATA
4	BLACK	4	GROUND

Cross Section:



		Date	Name	Part No. AK-300200-018-S EAN:4016032283102
Drawn by		May.20,2013	Sean	
Checked by		May.20,2013	Joe	
Approved by		May.20,2013	Andy	Title USB A/M - A/F CABLE
ASSMANN Electronic GmbH				
Scale	N/A		Sheet	
Unit	MM		1/2	

STxxxxx

1

2

3

4

5

6

7